

HUAYA

Xingtai Huaya Machine Tool Manufacturing Co., Ltd

Add: No. 37, Xingjiawan Industrial Zone, Xingtai City, Hebei, China

Email: info@huaya.cn

Web: www.huayaba.com

邢台市华亚机床制造有限公司

地址：河北省邢台市邢湾工业区37号

邮箱：info@huaya.cn

网址：www.huayaba.com

Xingtai Huaya Machine
Tool Manufacturing Co., Ltd

邢台市华亚机床制造有限公司

HUAYA
华亚重工

www.huayaba.com





About us 关于我们

Xingtai Huaya Machine Tool Manufacturing Co., LTD is a heavy equipment manufacturing enterprise. Since the first machine was manufactured in 1996, through continuous efforts and innovation, it has grown into an enterprise with five subsidiaries. The company covers an area of 200,000 square meters and have more than 600 employees. At present, it is a large scale, complete industrial chain, comprehensive strength and good economic benefits of engineering equipment R&D, manufacturing and export base. The persistent pursuit of reliable quality is the consistent philosophy of Huaya, also the key to the development and growth of Huaya.

Excellence is the bridge to the world. As the source of lean production, Huaya is committed to quality improvement and continuously meets the needs of customers. From point to surface, from detail to whole, from production to management. Huaya carries the value mission of the future and committed to contributing to world-class brands.

HUAYA has a first-class R & D team, a first-class manufacturing team and a first-class after-sales service team. It passed ISO9001 international quality management system certification, and passed CE, EAC, TUV, EPA4 engine, EURO3 engine, EURO5 engine certificates to meet customer requirements, The products of HUAYA are always in sync with the advanced level of the world and shaping a new image of HUAYA.

We firmly believe that the best service is to provide the most suitable products and solutions after fully understanding you.

邢台华亚机床制造有限公司是一家重型装备制造企业。自1996年制造第一台机器以来，经过不断的努力和创新，现已发展成为拥有5家子公司的企业。公司占地面积20万平方米，员工600余人。目前是规模大、产业链完整、综合实力和经济效益好的工程装备研发、制造和出口基地。对可靠品质的执着追求是华亚一贯的理念，也是华亚得以发展壮大关键。

卓越是通向世界的桥梁。华亚作为精益生产之源，致力于品质提升，不断满足客户需求。从点到面，从细节到整体，从生产到管理。华亚承载着面向未来的价值使命，致力于为世界一流品牌做贡献。

华亚拥有一流的研发团队、一流的制造团队和一流的售后服务团队。通过了ISO9001国际质量管理体系认证，并通过了CE、EAC、TUV、EPA4发动机、EURO3发动机、EURO5发动机证书以满足客户要求，华亚产品始终与世界先进水平同步，塑造全新华亚形象。

我们坚信，最好的服务是在充分了解您后提供最合适的产品和解决方案。

HUAYA CARRY THE FUTURE
胜出，必有所长

After-sales service

The Warranty period is either 1 year or 1200 working hours upon receipt whichever comes first.

English-speaking service team is standby to answer any questions you meet while machine is in use.

We guarantee that all your questions will be answered within 12 hours.

Parts in need will be delivered either by air or sea upon request.



HUAYA
华亚重工

1.5-3.5 TONS



HUA YA CARRY THE FUTURE
胜出，必有所长

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车

·Stage V ·EPA 4

Forklifts are special safety equipment, each component of the vehicle is a safety component. The safety valve in the oil cylinder will ensure the safe use of the vehicle.



Features



Exceptional powertrain

Combine China Xinchai C490, Quanchai diesel engine and Nissan K25 gasoline engine with automatic transmission design, operator has got a powertrain that delivers strong load handling and smooth acceleration.



Combination display

LED Display offers useful information, such as the fuel meter, water temperature indicator and hour meters the convenience of operator.



Wide view mast

Strong U-steel, lifting cylinder, chain, bearing, and is equipped with a safety valve, when the oil cylinder or oil pipe breaks, the mast will not fall down instantly, but will decline slowly.



Reliable component

SHIMADZU pump and valve, EATON oil pipe ensure precise control and durable lifetime, never leak oil



Comfortable seat

The new suspension adjustable seats make long-term operation more comfortable and the safety of the driver is guaranteed with seat belts.



Ergonomics

Roomy foot space of 1.06 meters wide enables a comfort operation. Hydraulic controls are located besides display for maximum operator comfort, while allowing easy Left-side entry and exit.

The publicized pictures, specification and parameter is offered to refer, please see according to the real goods
注：本宣传画册图片，规格参数仅供参考，以实物为准。

Xingtai Huaya Machine Tool Manufacturing Co., Ltd. 邢台华亚机床制造有限公司

Add: Xingjiawan Industrial Zone, Xingtai City, Hebei, China 河北省邢台市邢湾工业区

E-mail: Info@huaya.cn Tel: 008618732966546 Website: www.huayaba.com




Website




WhatsApp

Machine 2D Graph

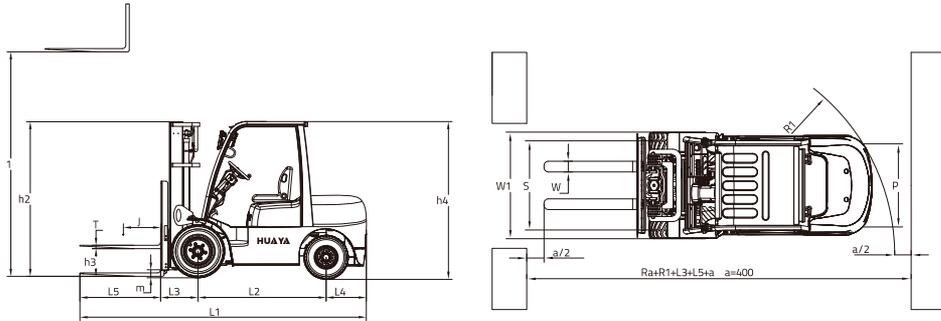

Capacity Chart

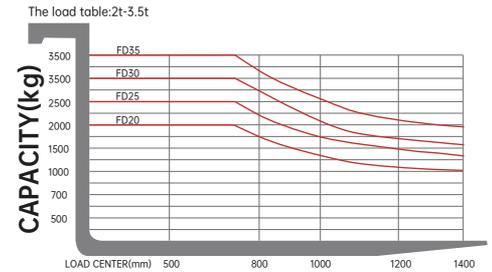

Machine Parameters

特征 Characteristics		CPC15	CPC20	CPC25	CPC30	CPC35	
Power 动力	-	Diesel	Diesel	Diesel	Diesel	Diesel	optional
Rated Capacity 额定荷载	kg	1500	2000	2500	3000	3500	/
Load Center 载荷中心	J(mm)	500	500	500	500	500	/
Max. Lifting Height 提升高度	H1(mm)	3000	3000	3000	3000	3000	optional
Free Lifting Height 自由提升高度	H3(mm)	135	135	135	145	160	optional
Fork Size L×W×H 货叉尺寸	L5×W×H(mm)	920×100×35	1070×122×40	1070×122×40	1070×122×40	1070×122×40	optional
Mast Tilting Angle Forward/Backward 门架倾角	°	6/12	6/12	6/12	6/12	6/12	/
Min. Turing Radius 最小转弯半径	R1(mm)	1955	2190	2240	2400	2445	/
Min. Ground Clearance(mast) 最小离地间隙	Ra(mm)	110	120	120	135	135	/
Overhead Guard Height 护顶架高度	H4(mm)	2070	2140	2140	2160	2160	optional
性能 Performance							
Max. Traveling Speed(loaded) 最大行驶速度	km/h	13.5	19/17	19/17	19/19	19/19	/
Max. Lifting Speed(loaded/unloaded) 最大起升速度	mm/s	590	550/530	550/530	450/480	330/370	/
Max. Traction/Gradeability(loaded) 最大牵引力/爬坡能力	KN/°	17/20	17/20	18/20	20/20	22/20	/
Min. Right Angle Stacking Aisle Width 最小直角通道宽度	mm	2052	2010	2010	2120	2235	/
尺寸 Dimensions							
Overall Length(without fork) 全长	L1(mm)	2255	2453	2540	2700	2700	/
Overall Width 全宽	W1(mm)	1070	1160	1160	1225	1225	/
Mast Lowered Height 门架落地高度	H2(mm)	1995	2065	2065	2065	2065	optional
Mast Extended Height 货叉最大起升时高度(带挡货架)	mm	4030	4220	4220	4265	4265	optional
底盘 Chassis							
Tyre(Front) 前轮胎	-	6.50-10-10PR	7.00-12-12PR	7.00-12-12PR	28x9-15-12PR	28x9-15-12PR	optional
Tyre(Rear) 后轮胎	-	5.00-8-8PR	6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	optional
Wheelbase 轴距	L2(mm)	1410	1600	1600	1700	1700	/
Tires distance(Front/Rear) 轮距	S(mm)	890/920	970/970	970/970	1000/970	1000/970	/
Vehicle weight(Non-load) 自重	kg	2660	3530	3880	4350	4780	/
驱动 Powertrain							
Battery(Voltage/Capacity) 蓄电池	V/Ah	12/80	12/80	12/80	12/80	12/80	/
Engine(Brand) 发动机(品牌)	-	Xinchai	Xinchai	Xinchai	Xinchai	Xinchai	optional
Engine(Rated power) 发动机(额定功率)	kw/r.p.m	30/2600	36.8/2500	36.8/2500	36.8/2500	36.8/2500	optional
Engine(Rated torque) 发动机(额定转矩)	Nm/r.p.m	131/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	optional
Engine(Cylinder amount) 发动机(气缸数量)	-	4	4	4	4	4	optional
Engine(Bore×Stroke) 发动机(缸径×冲程)	mm	85×100	90×105	90×105	90×105	90×105	optional
Engine(Displacement) 发动机(排量)	L	2.27	2.54	2.54	2.54	2.54	optional
Fuel Tank Capacity 燃油箱容量	L	40	60	60	70	70	/
Transmission(Front/Rear) 传动档位(前/后)	-	Manual machinery					optional
Working Pressure 工作压力	Mpa	17.5					/

Remarks: The above parameters are based on 3M duplex standard mast.

4.0-5.0 TONS



HUA YA CARRY THE FUTURE
胜出，必有所长

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车

·Stage V ·EPA 4

Forklifts are special safety equipment, and each component of the vehicle is a safety component. The safety valve in the oil cylinder will ensure the safe use of the vehicle.



Features




Exceptional powertrain

Combine China Xinchai C490, Quanchai diesel engine and Nissan K25 gasoline engine with automatic transmission design, operator has got a powertrain that delivers strong load handling and smooth acceleration.



Combination display

LED Display offers useful information, such as the fuel meter, water temperature indicator and hour meters the convenience of operator.

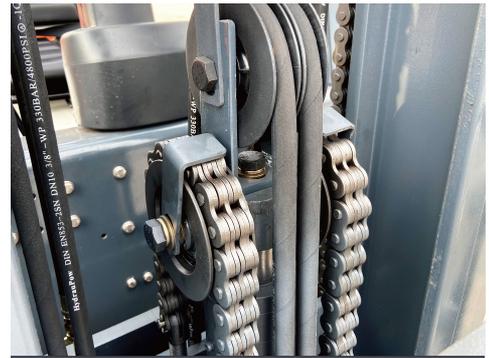

Wide view mast

Strong U-steel, lifting cylinder, chain, bearing, and is equipped with a safety valve, when the oil cylinder or oil pipe breaks, the mast will not fall down instantly, but will decline slowly.




Reliable component

SHIMADZU pump and valve, EATON oil pipe ensure precise control and durable lifetime, never leak oil



Comfortable seat

The new suspension adjustable seats make long-term operation more comfortable and the safety of the driver is guaranteed with seat belts.

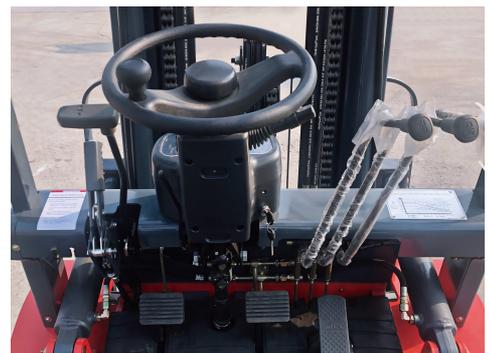

Ergonomics

Roomy foot space of 1.06 meters wide enables a comfort operation. Hydraulic controls are located besides display for maximum operator comfort, while allowing easy Left-side entry and exit.

The publicized pictures, specification and parameter is offered to refer, please see according to the real goods
注：本宣传画册图片，规格参数仅供参考，以实物为准。

Xingtai Huaya Machine Tool Manufacturing Co., Ltd. 邢台华亚机床制造有限公司

Add: Xingjiawan Industrial Zone, Xingtai City, Hebei, China 河北省邢台市邢湾工业区

E-mail: Info@huaya.cn Tel: 008618732966546 Website: www.huayaba.com




Website



WhatsApp

Machine 2D Graph

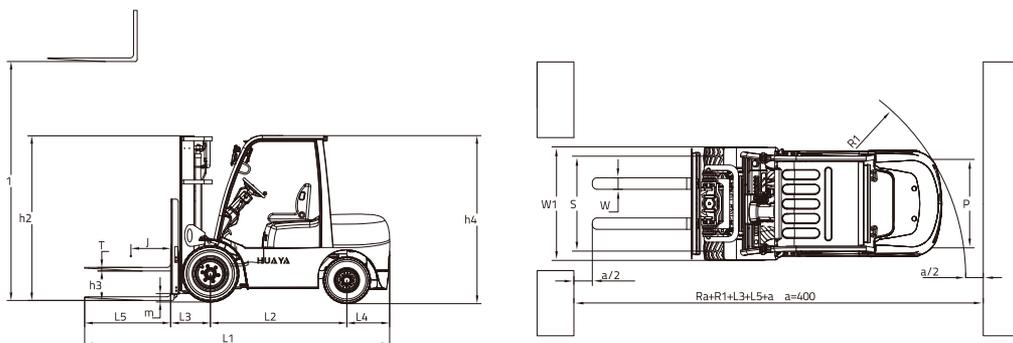


4.0-5.0 TONS

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车


Machine Parameters

特征 Characteristics		CPC40	CPC45	CPC50	
Power 动力	-	Diesel	Diesel	Diesel	optional
Rated Capacity 额定荷载	kg	4000	4500	5000	/
Load Center 载荷中心	J(mm)	500	500	500	/
Max. Lifting Height 提升高度	H1(mm)	3000	3000	3000	optional
Free Lifting Height 自由提升高度	H3(mm)	135	135	135	optional
Fork Size L×W×H 货叉尺寸	L5×W×H(mm)	1070×150×45	1070×150×45	1070×150×45	optional
Mast Tilting Angle Forward/Backward 门架倾角	°	6/12	6/12	6/12	/
Min. Turing Radius 最小转弯半径	R1(mm)	2620	2680	2680	/
Min. Ground Clearance(mast) 最小离地间隙	Ra(mm)	135	135	135	/
Overhead Guard Height 护顶架高度	H4(mm)	2160	2210	2210	optional
性能 Performance					
Max. Traveling Speed(loaded) 最大行驶速度	km/h	20	20	22	/
Max. Lifting Speed(loaded/unloaded) 最大起升速度	mm/s	330	330	330	/
Max. Traction/Gradeability(loaded) 最大牵引力/爬坡能力	KN/P	15.5	18.5	18.5	/
Min. Right Angle Stacking Aisle Width 最小直角通道宽度	mm	2385	2450	2450	/
尺寸 Dimensions					
Overall Length(without fork) 全长	L1(mm)	2860	2975	2975	/
Overall Width 全宽	W1(mm)	1226	1225	1225	/
Mast Lowered Height 门架落地高度	H2(mm)	2185	2185	2185	optional
Mast Extended Height 货叉最大起升时高度(带挡货架)	mm	4272	4250	4250	optional
底盘 Chassis					
Tyre(Front) 前轮胎	-	250-15-16PR	300-15-20PR	300-15-20PR	optional
Tyre(Rear) 后轮胎	-	6.50-10-10PR	700-12-12PR	700-12-12PR	optional
Wheelbase 轴距	L2(mm)	1900	1960	1960	/
Tires distance(Front/Rear) 轮距	S(mm)	1000/970	1000/970	1000/970	/
Vehicle weight(Non-load) 自重	kg	5000	5100	5500	/
驱动 Powertrain					
Battery(Voltage/Capacity) 蓄电池	V/Ah	12/80	12/80	12/80	/
Engine(Brand) 发动机(品牌)	-	Xinchai	Xinchai	Xinchai	optional
Engine(Rated power) 发动机(额定功率)	kw/r.p.m	37/2500	36.8/2500	36.8/2500	optional
Engine(Rated torque) 发动机(额定转矩)	Nm/r.p.m	174/1700	186/1700-1900	186/1700-1900	optional
Engine(Cylinder amount) 发动机(气缸数量)	-	4	4	4	optional
Engine(Bore×Stroke) 发动机(缸径×冲程)	mm	95×105	98×105	98×105	optional
Engine(Displacement) 发动机(排量)	L	2.98	3.17	3.17	optional
Fuel Tank Capacity 燃油箱容量	L	70	70	70	/
Transmission(Front/Rear) 传动档位(前/后)	-		Manual machinery		optional
Working Pressure 工作压力	Mpa	17.5	18	18	/


Capacity Chart

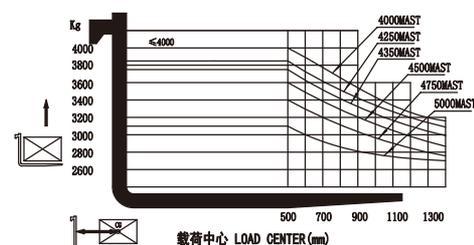

4T 载荷曲线图
4T load curve

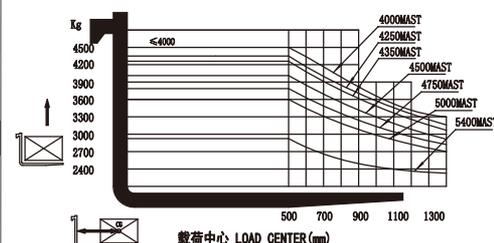

4.5T 载荷曲线图
4.5T load curve

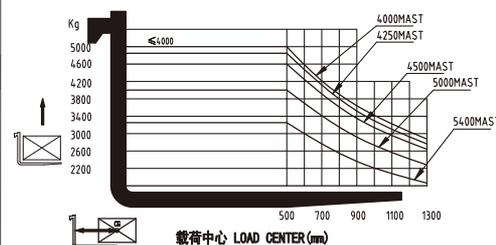

5.0T 载荷曲线图
5.0T load curve

Remarks: The above parameters are based on 3M duplex standard mast.

6.0-7.0 TONS



HUA YA CARRY THE FUTURE
胜出，必有所长

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车

·Stage V ·EPA 4

Forklifts are special safety equipment, and each component of the vehicle is a safety component. The safety valve in the oil cylinder will ensure the safe use of the vehicle.



Features




Fork positioner & Side shifter

a hydraulic attachment that moves the tines (forks) together or apart. This removes the need for the operator to manually adjust the tines for different-sized loads.



Combination display

LED Display offers useful information, such as the fuel meter, water temperature indicator and hour meters the convenience of operator.

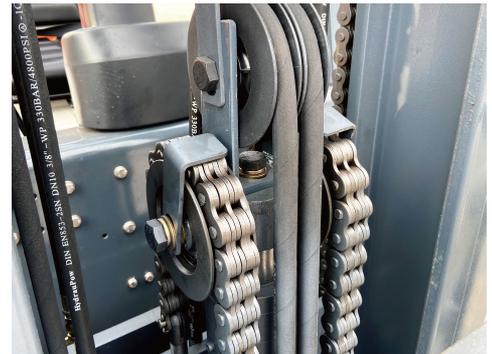

Wide view mast

Strong U-steel, lifting cylinder, chain, bearing, and is equipped with a safety valve, when the oil cylinder or oil pipe breaks, the mast will not fall down instantly, will slowly decline.



Reliable component

SHIMADZU pump and valve, EATON oil pipe ensure precise control and durable lifetime, never leak oil.



Comfortable seat

The new suspension adjustable seats make long-term operation more comfortable and the safety of the driver is guaranteed with seat belts.



Ergonomics

Roomy foot space of 1.06 meters wide enables a comfort operation. Hydraulic controls are located besides display for maximum operator comfort, while allowing easy Left-side entry and exit.

The publicized pictures, specification and parameter is offered to refer, please see according to the real goods
注：本宣传画册图片，规格参数仅供参考，以实物为准。

Xingtai Huaya Machine Tool Manufacturing Co., Ltd. 邢台华亚机床制造有限公司

Add: Xingjiawan Industrial Zone, Xingtai City, Hebei, China 河北省邢台市邢湾工业区

E-mail: Info@huaya.cn Tel: 008618732966546 Website: www.huayaba.com




Website



WhatsApp

Machine 2D Graph

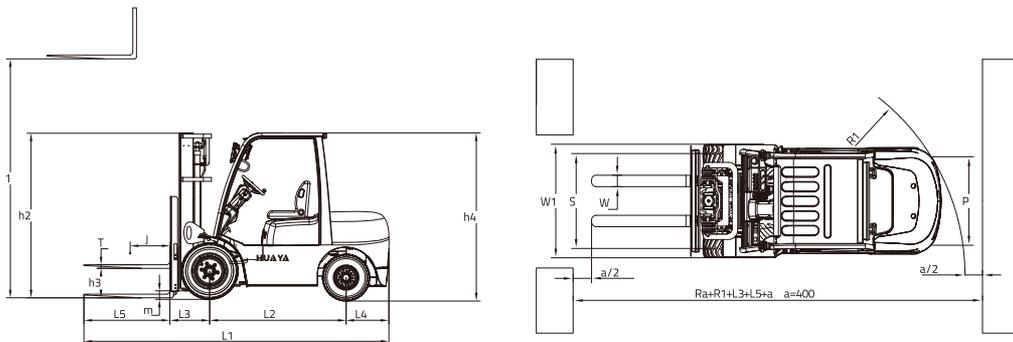


6.0-7.0 TONS

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车


Machine Parameters

特征 Characteristics		CPC60	CPC70	
Power 动力	-	Diesel	Diesel	optional
Rated Capacity 额定荷载	kg	6000	7000	/
Load Center 载荷中心	J(mm)	600	600	/
Max. Lifting Height 提升高度	H1(mm)	3000	3000	optional
Free Lifting Height 自由提升高度	H3(mm)	150	150	optional
Fork Size L×W×H 货叉尺寸	L5×W×H(mm)	1220×150×60	1220×150×65	optional
Mast Tilting Angle Forward/Backward 门架倾角	°	6/12	6/12	/
Min. Turing Radius 最小转弯半径	R1(mm)	3250	3380	/
Min. Ground Clearance(mast) 最小离地间隙	Ra(mm)	200	200	/
Overhead Guard Height 护顶架高度	H4(mm)	2460	2450	optional
性能 Performance				
Max. Traveling Speed(loaded) 最大行驶速度	km/h	26	26/29	/
Max. Lifting Speed(loaded/unloaded) 最大起升速度	mm/s	400	460/500	/
Max. Traction/Gradeability(loaded) 最大牵引力/爬坡能力	KN/°	51.4	53	/
Min. Right Angle Stacking Aisle Width 最小直角通道宽度	mm	2960	3040	/
尺寸 Dimensions				
Overall Length(without fork) 全长	L1(mm)	3470	3580	/
Overall Width 全宽	W1(mm)	1995	1995	/
Mast Lowered Height 门架落地高度	H2(mm)	2625	2625	optional
Mast Extended Height 货叉最大起升时高度 (带挡货架)	mm	4380	4420	optional
底盘 Chassis				
Tyre(Front) 前轮胎	-	8.25-15-14PR	8.25-15-14PR	optional
Tyre(Rear) 后轮胎	-	8.25-15-14PR	8.25-15-14PR	optional
Wheelbase 轴距	L2(mm)	2250	2250	/
Tires distance(Front/Rear) 轮距	S(mm)	1470/1700	1470/1700	/
Vehicle weight(Non-load) 自重	kg	8640	9300	/
驱动 Powertrain				
Battery(Voltage/Capacity) 蓄电池	V/Ah	(12/80)×2	(12/80)×2	/
Engine(Brand) 发动机(品牌)	-	Quanchai	Quanchai	optional
Engine(Rated power) 发动机(额定功率)	kw/r.p.m	85/2200	85/2200	optional
Engine(Rated torque) 发动机(额定转矩)	Nm/r.p.m	500/1600	500/1600	optional
Engine(Cylinder amount) 发动机(气缸数量)	-	4	4	optional
Engine(Bore×Stroke) 发动机(缸径×冲程)	mm	4-105X124	4-105X124	optional
Engine(Displacement) 发动机(排量)	L	4.3	4.3	optional
Fuel Tank Capacity 燃油箱容量	L	160	160	/
Transmission(Front/Rear) 传动档位(前/后)	-	2/2	2/2	optional
Working Pressure 工作压力	Mpa	20	20	/

Capacity Chart

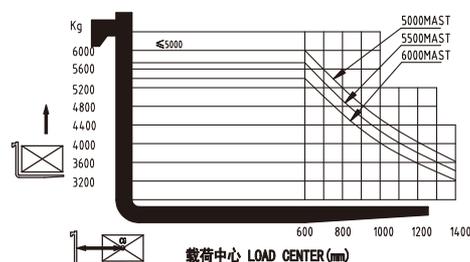

6.0T 载荷曲线图
6.0T load curve

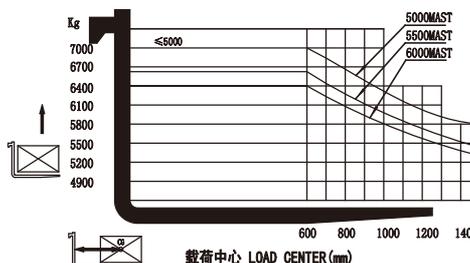

7.0T 载荷曲线图
7.0T load curve



ISUZU C240



NISSAN K25

Remarks: The above parameters are based on 3M duplex standard mast.

8.0-10 TONS



HUAYA CARRY THE FUTURE
胜出，必有所长

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车

·Stage V ·EPA 4

Forklifts are special safety equipment, and each component of the vehicle is a safety component. The safety valve in the oil cylinder will ensure the safe use of the vehicle.



Features



Fork positioner & Side shifter

a hydraulic attachment that moves the tines (forks) together or apart. This removes the need for the operator to manually adjust the tines for different-sized loads.




Combination display

LED Display offers useful information, such as the fuel meter, water temperature indicator and hour meters the convenience of operator.



Wide view mast

Strong U-steel, lifting cylinder, chain, bearing, and is equipped with a safety valve, when the oil cylinder or oil pipe breaks, the mast will not fall down instantly, will slowly decline.

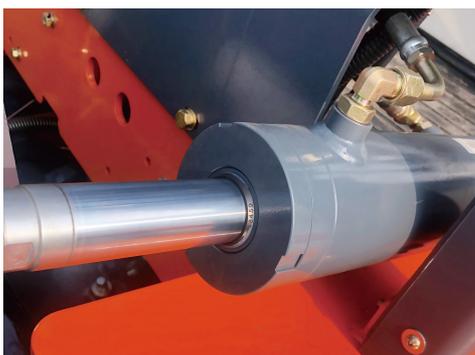

Reliable component

SHIMADZU pump and valve, EATON oil pipe ensure precise control and durable lifetime, never leak oil.



Comfortable seat

The new suspension adjustable seats make long-term operation more comfortable and the safety of the driver is guaranteed with seat belts.



Ergonomics

Roomy foot space of 1.06 meters wide enables a comfort operation. Hydraulic controls are located besides display for maximum operator comfort, while allowing easy Left-side entry and exit.

The publicized pictures, specification and parameter is offered to refer, please see according to the real goods

注：本宣传画册图片，规格参数仅供参考，以实物为准。

Xingtai Huaya Machine Tool Manufacturing Co., Ltd. 邢台华亚机床制造有限公司

Add: Xingjiawan Industrial Zone, Xingtai City, Hebei, China 河北省邢台市邢湾工业区

E-mail: Info@huaya.cn Tel: 008618732966546 Website: www.huayaba.com




Website



WhatsApp

Machine 2D Graph

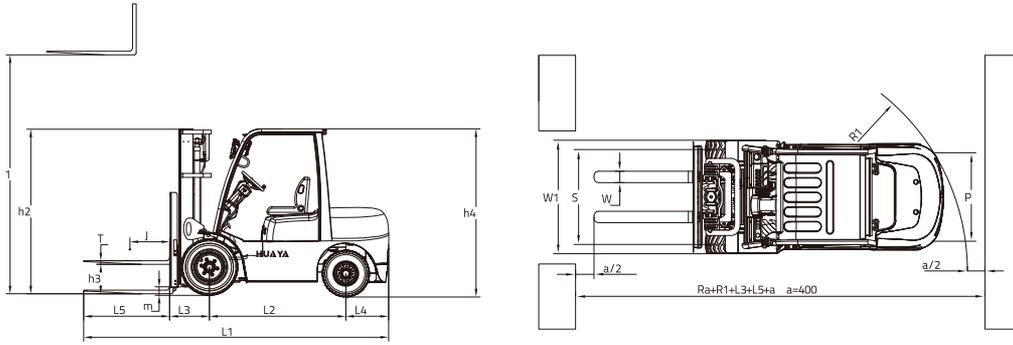


8.0-10 TONS

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车


Machine Parameters

特征 Characteristics		CPC80	CPC100	
Power 动力	-	Diesel	Diesel	optional
Rated Capacity 额定荷载	kg	8000	10000	/
Load Center 载荷中心	J(mm)	600	600	/
Max. Lifting Height 提升高度	H1(mm)	3000	3000	optional
Free Lifting Height 自由提升高度	H3(mm)	150	150	optional
Fork Size L×W×H 货叉尺寸	L5×W×H(mm)	1220×150×70	1220×150×80	optional
Mast Tilting Angle Forward/Backward 门架倾角	°	6/12	6/12	/
Min. Turing Radius 最小转弯半径	R1(mm)	3580	3850	/
Min. Ground Clearance(mast) 最小离地间隙	Ra(mm)	200	200	/
Overhead Guard Height 护顶架高度	H4(mm)	2450	2500	optional
性能 Performance				
Max. Traveling Speed(loaded) 最大行驶速度	km/h	26/29	26/29	/
Max. Lifting Speed(loaded/unloaded) 最大起升速度	mm/s	460/500	460/500	/
Max. Traction/Gradeability(loaded) 最大牵引力/爬坡能力	KN/°	53	53	/
Min. Right Angle Stacking Aisle Width 最小直角通道宽度	mm	3240	3440	/
尺寸 Dimensions				
Overall Length(without fork) 全长	L1(mm)	3780	4020	/
Overall Width 全宽	W1(mm)	1995	2100	/
Mast Lowered Height 门架落地高度	H2(mm)	2625	2625	optional
Mast Extended Height 货叉最大起升时高度 (带挡货架)	mm	4420	4420	optional
底盘 Chassis				
Tyre(Front) 前轮胎	-	8.25-15-14PR	8.25-15-14PR	optional
Tyre(Rear) 后轮胎	-	8.25-15-14PR	8.25-15-14PR	optional
Wheelbase 轴距	L2(mm)	2450	2450	/
Tires distance(Front/Rear) 轮距	S(mm)	1470/1700	1470/1700	/
Vehicle weight(Non-load) 自重	kg	9650	12500	/
驱动 Powertrain				
Battery(Voltage/Capacity) 蓄电池	V/Ah	24/160	24/160	/
Engine(Brand) 发动机(品牌)	-	Xichai	Xichai	optional
Engine(Rated power) 发动机(额定功率)	kw/r.p.m	85/2200	85/2200	optional
Engine(Rated torque) 发动机(额定转矩)	Nm/r.p.m	460/1400-1600	460/1400-1600	optional
Engine(Cylinder amount) 发动机(气缸数量)	-	6	6	optional
Engine(Bore×Stroke) 发动机(缸径×冲程)	mm	4-110×124	4-110×124	optional
Engine(Displacement) 发动机(排量)	L	4.75	4.75	/
Fuel Tank Capacity 燃油箱容量	L	160	160	/
Transmission(Front/Rear) 传动档位(前/后)	-	2/2	2/2	optional
Working Pressure 工作压力	Mpa	20	20	/


Capacity Chart

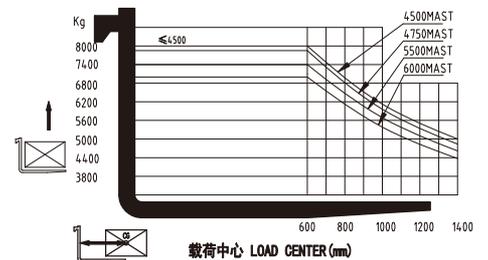

8.0T 载荷曲线图
8.0T load curve

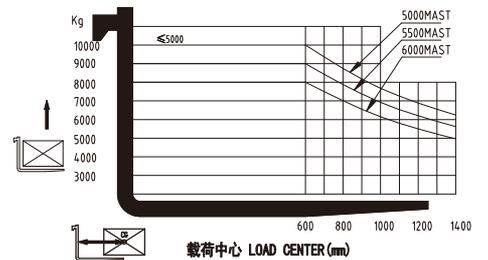

10T 载荷曲线图
10T load curve

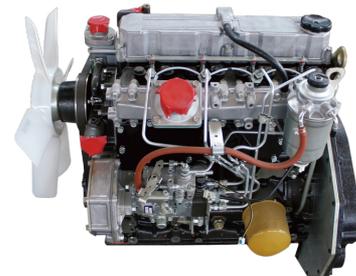

MITSUBISHI S4S



YANMAR 4TNE98

Remarks: The above parameters are based on 3M duplex standard mast.

Attachments



HUAYA CARRY THE FUTURE
胜出，必有所长

Diesel /Gasoline/LPG Forklift

柴油/汽油/LPG叉车



Cab – the area that contains a seat for the operator along with the control pedals, steering wheel, levers, switches and a dashboard containing operator readouts. The cab area may be open-air or enclosed, but it is covered by the cage-like overhead guard assembly. When enclosed, the cab may also be equipped with a cab heater for cold weather countries along with a fan or air conditioner for hot weather.

Tires – either solid for indoor use, or pneumatic for outdoor use.




Manned platform – a lift platform that slides onto the tines (forks) and is meant for hoisting workers. The manned platform has railings to keep the person from falling and brackets for attaching a safety harness. Also, a strap or chain is used to attach the manned platform to the carriage of the forklift.

Use an internal combustion engine of LPG. The fuel is often stored in a gas cylinder mounted to the rear of the forklift. This allows for quick changing of the cylinder once the LPG runs out. LPG forklifts are quieter than diesel forklifts, while offering similar levels of performance.



The publicized pictures, specification and parameter is offered to refer, please see according to the real goods

注：本宣传画册图片，规格参数仅供参考，以实物为准。

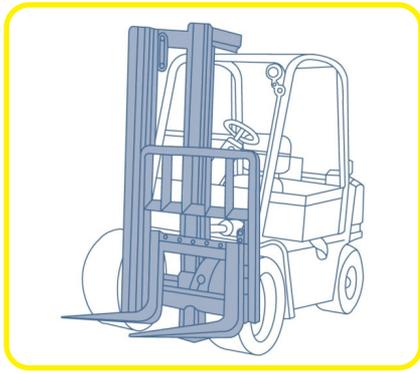

Sideshift




Fork positioner




Hinged fork




Rotator

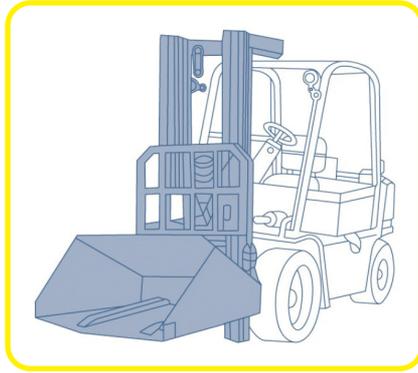

Hinged bucket

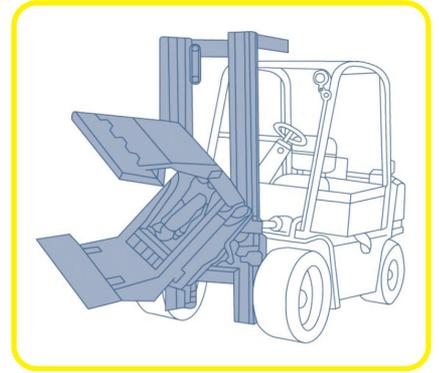


Rotating roll clamp

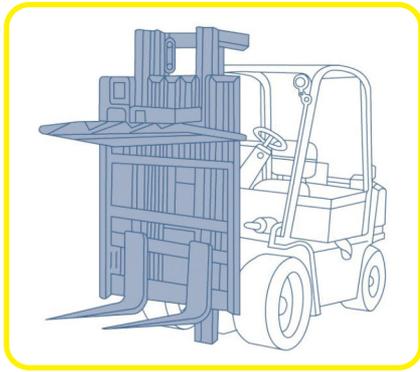


Load stabilizer




Push pull

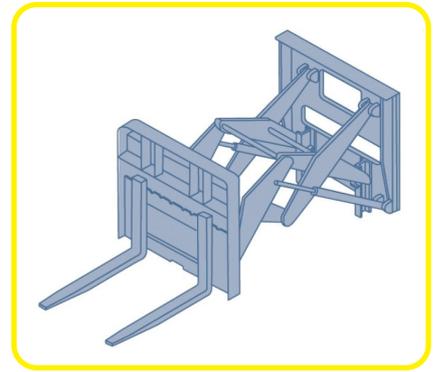


Load extender

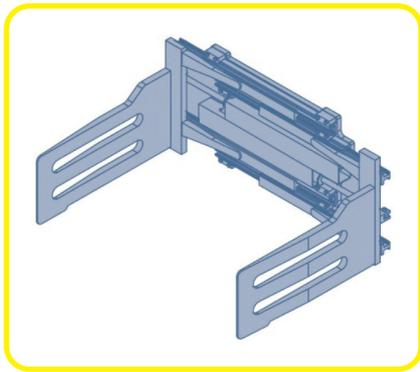

Bale clamp

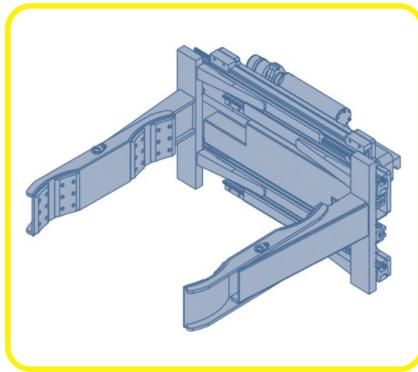

Drum clamp

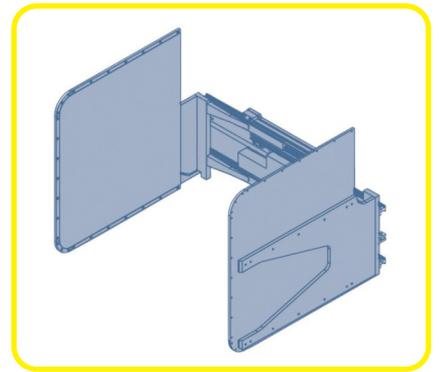

Carton clamp

